

Flood Detector



Protect your property from water damage! The flood detector is designed to sense the presence of water in basements, yachts and many others residential and commercial applications, providing early warning of developing floods. The flood detector is designed so that the transceiver is mounted on the wall and the flood sensor is placed in a location where leakage or flooding is probable. Its great compatibility with the U-Net product family makes it suitable for smart home cloud based platforms.

Main Features


- IP44 protection
- Special water sensor
- Wireless two-way communication
- LED indication
- Flood sensor cable length up to 3m
- Auto-pairing to the gateway
- Reports status to the gateway every hour



Brief Product Specifications

Frequency range	868.30 MHz / 923.00 MHz
RF range (open space)	Up to 1000m
RF protocol	Unet 5.0
User interface	1 x Link, 1 x LED
Battery type	1.5V alkaline AA x 3

Operation temperature	0°C – 40°C
Operating humidity	85% RH max
Dimension (mm)	84.96(W) x 39(D) x 84.96(H)
Weight	240g, including batteries

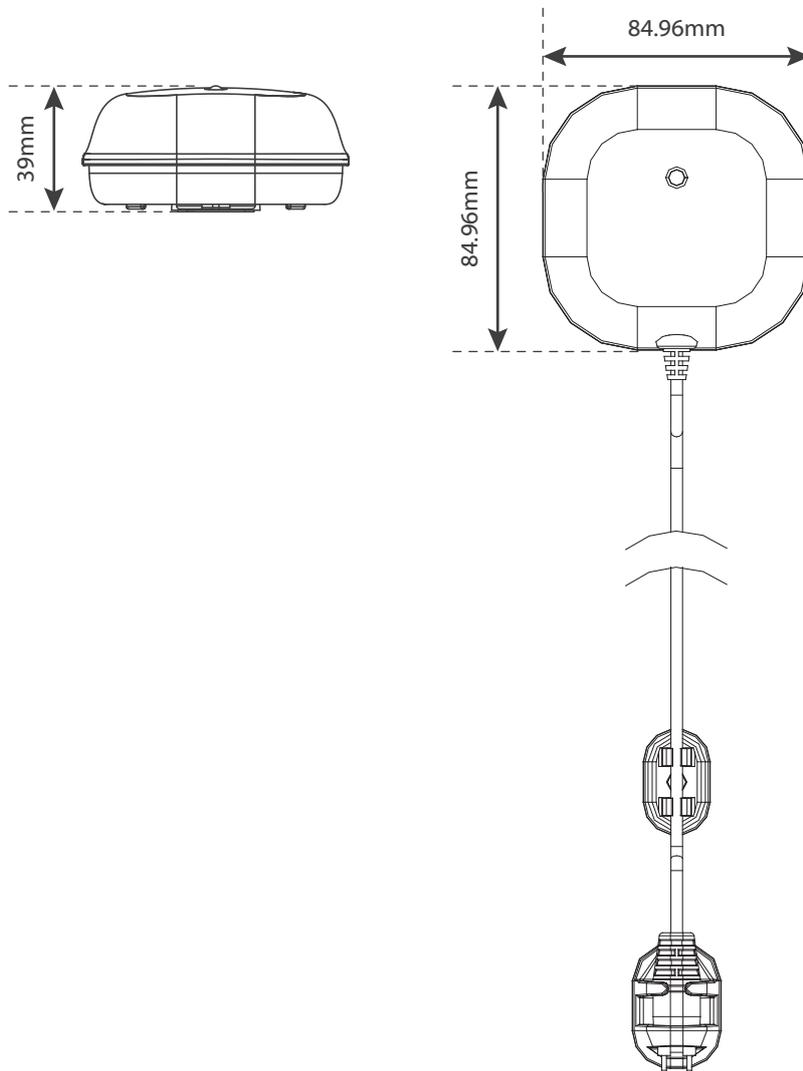

Confidentiality Statement

The purpose of this document is to provide general information about a product or products of Everspring Industry Co., Ltd. All information contained in this document is the confidential property of Everspring Industry Co., Ltd. Except where expressly authorized by Everspring Industry Co., Ltd., alteration, reproduction, redistribution, or transmission of this document by any means is strictly prohibited.