

Outdoor Siren



The SE204 operates as an outdoor siren powered by either DC power or batteries. Its noticeable presence acts as a visual indicator of an installed alarm system, serving as a deterrent to potential intruders. Once an alarm is triggered, it promptly notifies the surrounding area with a powerful 110-decibel piercing sound and a flashing red light. Its exceptional compatibility with the U-Net family of security products makes it well-suited for integration with smart home cloud-based platforms.


Main Features

- Wireless two-way communication
- Auto-pairing with Gateway
- Customizable Buzzer Volume
- Adjustable Alarm Sound Duration
- LED Strobe for Visible Deterrence
- Periodic Arming LED Indicator
- Tamper Alert Protection and Weatherproof Design
- Intelligent Lux Sensor for Energy Savings
- Anti-jamming detection



Brief Product Specifications

Frequency range	868MHz(EU) 923MHz(US)	Battery type	9v~12V/1A
RF range (open space)	Up to 1000m	Battery life	up to 5 years
RF protocol	U-Net 5.0	Power input	4*CR123A
Connector	1 x DC terminal	Operation temperature	-20°C~ +50°C
User interface	1 x Tamper switch, 1 x binding button, 1 x Strobe light, 1 x Arming indicator 1 x Siren piezo,	Operating humidity	95% RH max
Loudness @1m	Loud: 110dB Medium: 100dB Low:: 90d	Dimension (mm)	200(W) x 66(D) x 230(H)
		Weight	747.5g(include battery)

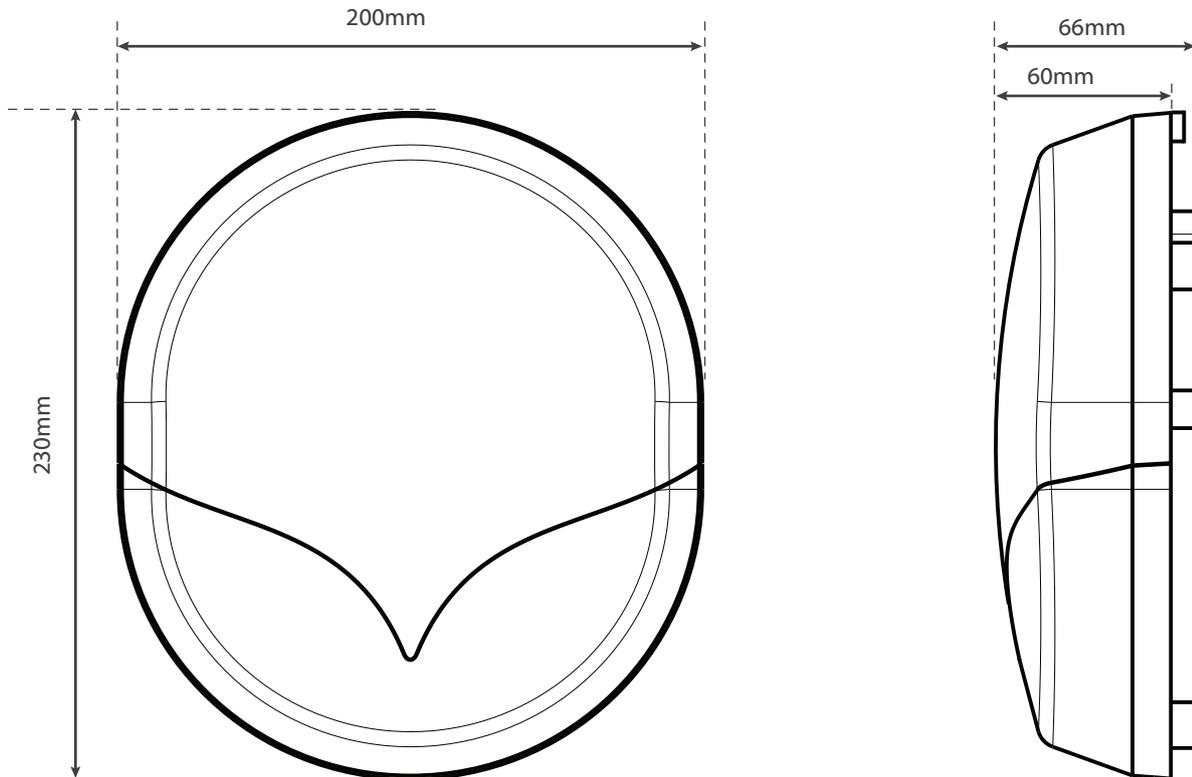

Confidentiality Statement

The purpose of this document is to provide general information about a product or products of Everspring Industry Co., Ltd. All information contained in this document is the confidential property of Everspring Industry Co., Ltd. Except where expressly authorized by Everspring Industry Co., Ltd., alteration, reproduction, redistribution, or transmission of this document by any means is strictly prohibited.