

# RF Detector



The SQ201 is a simple tool to assist the Installer when trouble shooting RF signal in the customer premise. The device measures RF level on the frequency band used by VIAS devices only. This covers frequency bands for Unet 5.0 and older Unet 3.0 devices.

## Main Features


- Display RF level in real time or peak only
- Monitor environment RF level
- Recording of RF level in internal flash storage
- Firmware upgrade through PC
- AA batteries or USB Powerbank



## Brief Product Specifications

Function	RF monitoring tool
RF protocol	U-Net 3.0 and 5.0
RF band	868Mhz, 923Mhz
PC connection	USB 2.0 , USB Type C

Power input	1.5V AA x 3 or external USB powerbank
Operating temperature	-10°C~ 50°C
Operating humidity	Up to 85% RH
Dimension (mm)	85(W) x 85(H) x 41(D)
Weight	173g (batteries included)

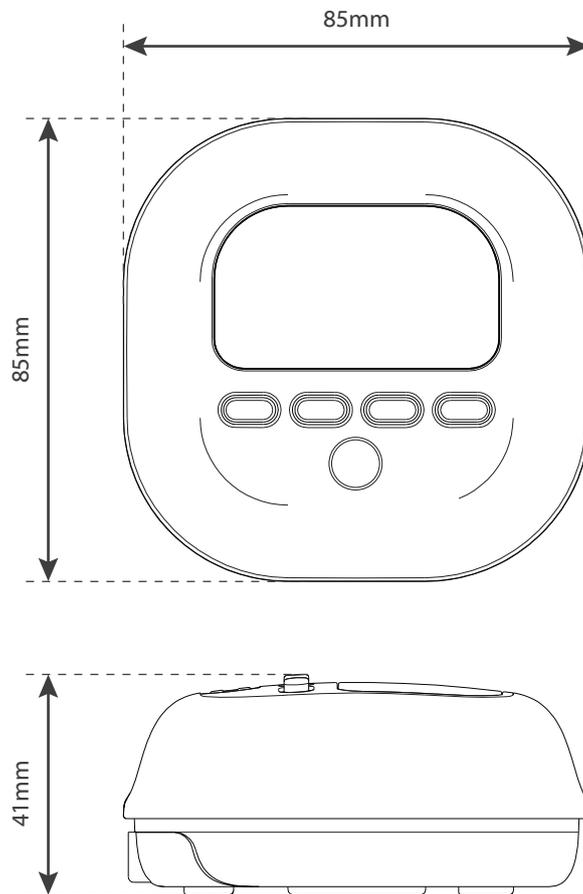

**Confidentiality Statement**

The purpose of this document is to provide general information about a product or products of Everspring Industry Co., Ltd. All information contained in this document is the confidential property of Everspring Industry Co., Ltd. Except where expressly authorized by Everspring Industry Co., Ltd., alteration, reproduction, redistribution, or transmission of this document by any means is strictly prohibited.